

## DAS MODUL MONO XSC

### Ninside Serie Pure Glass

DMMXSCNi420PG | DMMXSCNi425PG | DMMXSCNi430PG

Soluxtec's very first **N-Type** PV Module Made in Germany. Tunnel Oxide Passivation Contact Cells **TOPCON** are offering a new era of quality and efficiency within the product range of **SOLUXTEC DAS MODUL PURE GLASS**.



**30 YEARS**  
PRODUCT WARRANTY



**25 YEARS**  
LINEAR PERFORMANCE WARRANTY



#### O-PID

Optimized PID control. The combination of selected high-class materials prevent any occurrence of power induced degradation.

#### LID SAFE

Insusceptible against Light Induced Degradation, due to the absence of boron-oxygen recombination.

#### IMPROVED LCOE

LCOE of DMMXSCNi compared to industrial standard PV module technologies, provides much better results.

#### RELIABILITY

Inexhaustible in severe environmental conditions Ammonia (NH<sub>3</sub>) and Salt Mist certified.

#### POWERFULL



DMMXSCNi provides an efficiency up to 22%. Best conversion efficiency under low light. Bifaciality gain up to 20%.

#### S-MBB



Thanks to Soluxtec's smart multi-busbar technology, DMMXSCNi offers the highest light catching value. In combination with an extraordinary homogeneous current flow, it also offers higher power and better temperature as the current industrial average.

#### SRO - SHADING RESPONSE OPTIMIZED

Advantage of half cut cells connected in the middle of the pv module compared to standard production.



#### 25 YEARS LINEAR EFFICIENCY

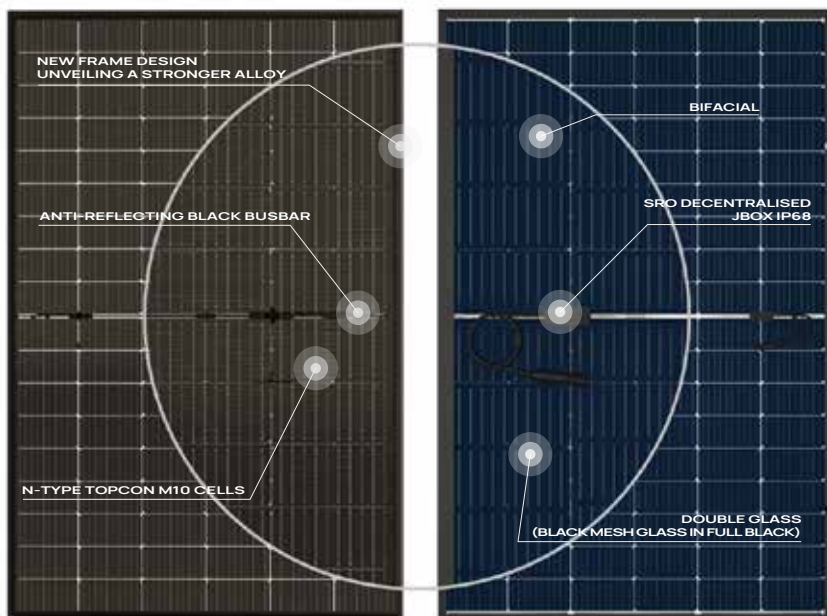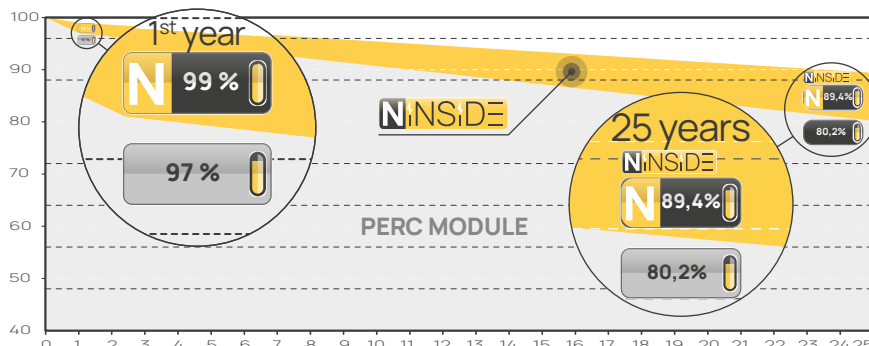

# DAS MODUL MONO XSC

## Ninside Serie Pure Glass

DMMXSCNi420PG | DMMXSCNi425PG | DMMXSCNi430PG



### ELECTRICAL PARAMETERS UNDER STC CONDITIONS

(1000 W/m<sup>2</sup>, 25°C, +/-2°C, AM=1,5 according to IEC 60904\_3).

Model	DMMXSCNi 420PG	GAIN BIFACIAL** +20%	DMMXSCNi 425PG	GAIN BIFACIAL** +20%	DMMXSCNi 430PG	GAIN BIFACIAL** +20%
Maximum Power Point (Pmax)*	420	504	425	510	430	516
Open Circuit Voltage (Voc)	38,19	38,19	38,37	38,37	38,55	38,55
Short Circuit Current (Isc)	13,80	16,56	13,88	16,66	13,96	16,75
Maximum Power Voltage (Vmpp)	32,09	32,09	32,27	32,27	32,46	32,46
Maximum Power Current (Impp)	13,09	15,71	13,18	15,82	13,25	15,90
Module Efficiency (%)	21,53		21,80		22,04	
Power Tolerance (Wp)	0-4,99Wp					
T temperature coefficient TC Isc	+0,03%/°C					
Temperature coefficient TC Voc	-0,28%/°C					
Temperature coefficient TC Pmpp	-0,30%/°C					

\*Power measurement of flasher unit +/- 3%

\*\* Gain will depend on installation mode

### ELECTRICAL PARAMETERS UNDER NMOT CONDITIONS

(800 W/m<sup>2</sup>, NMOT, AM=1,5)

MODEL	DMMXSCNi 420PG	DMMXSCNi 425PG	DMMXSCNi 430PG
Maximum Power Point (Pmax)	310	314	318
Open Circuit Voltage (Voc)	35,43	35,61	35,79
Short Circuit Current (Isc)	11,04	11,11	11,17
Maximum Power Voltage (Vmpp)	29,64	29,82	30,01
Maximum Power Current (Impp)	10,48	10,55	10,60

### OPERATING CONDITIONS

Max. Operating Voltage:	1500 Vdc
Protection Class:	Class II
Operating T <sup>0</sup> range:	-40°C ... +85°C
Max. Reverse Current:	25 A
STC 25°C:	+/- 2°C
NMOT 45°C:	+/- 2°C
Design load + (snow):	5400 PA
Maximum test load +:	8100 PA
Design load - (wind):	2666 PA
Maximum test load - :	4000 PA

### MECHANICAL PROPERTIES

Dimensions:	1722 * 1133 * 30 mm
Weight:	25.5 kg +/- 3 %
Cell:	108 half cut Mono TOPCON NTYPE
Junction Box:	IP 68, 3 diodes potted
Connectors:	MC4 Evo2 or Compatible
Cables:	2 * 1200 mm
Solar Glass front / back:	2 + 2 tempered ARC

### PACKAGING


Per Pallet:	34 Modules
Per Truck:	26 Pallets

### CERTIFICATIONS



IEC 61215, EN 61730, IEC61701, IEC62804, IEC62716, ISO9001, ISO14001
LVD 2014/35/EU, EMC 2014/30/EU.



### MECHANICAL

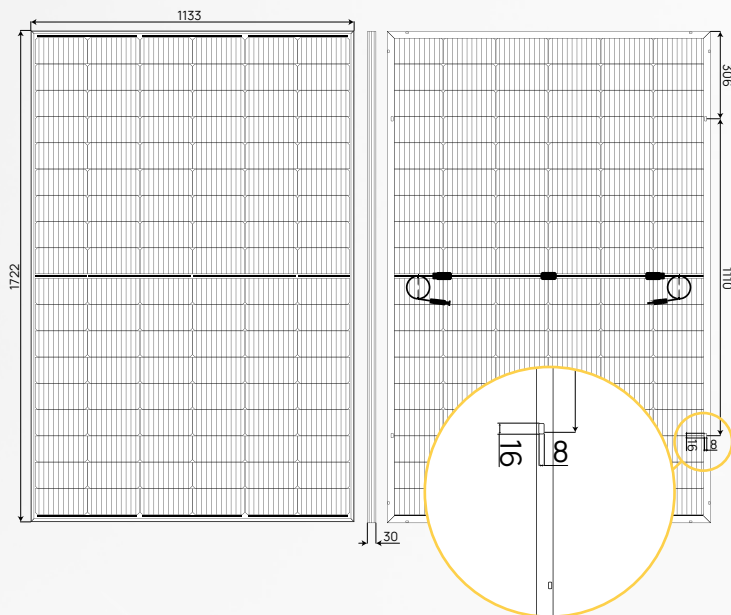

### CURRENT (A) VS VOLTAGE (V)

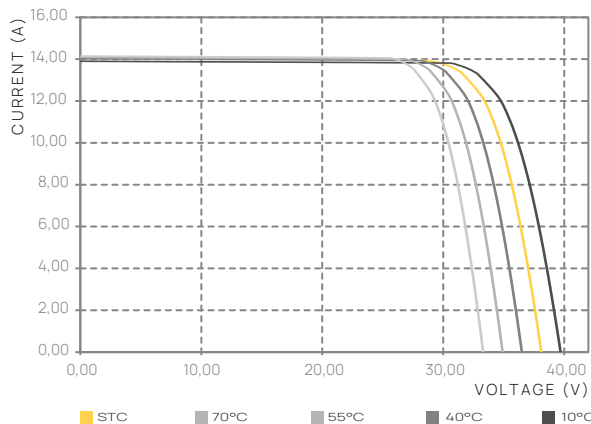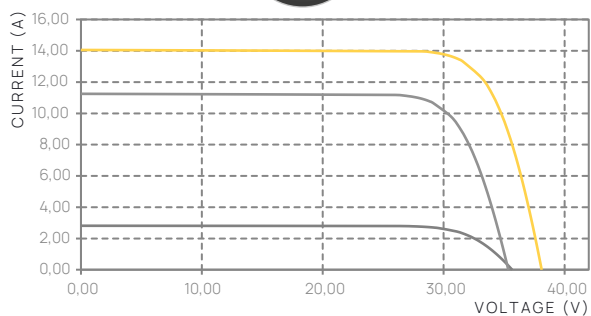

**SOLUXTEC**  
MADE IN GERMANY

This data sheet complies with the requirement of **EN 50380**. Soluxtec GmbH reserves the right to make specification changes without prior notice (2023)

**DISCLAIMER:** For final product, all specifications, and data may be subject to change to improve reliability, function, or design or otherwise.

